



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2020/03/26	

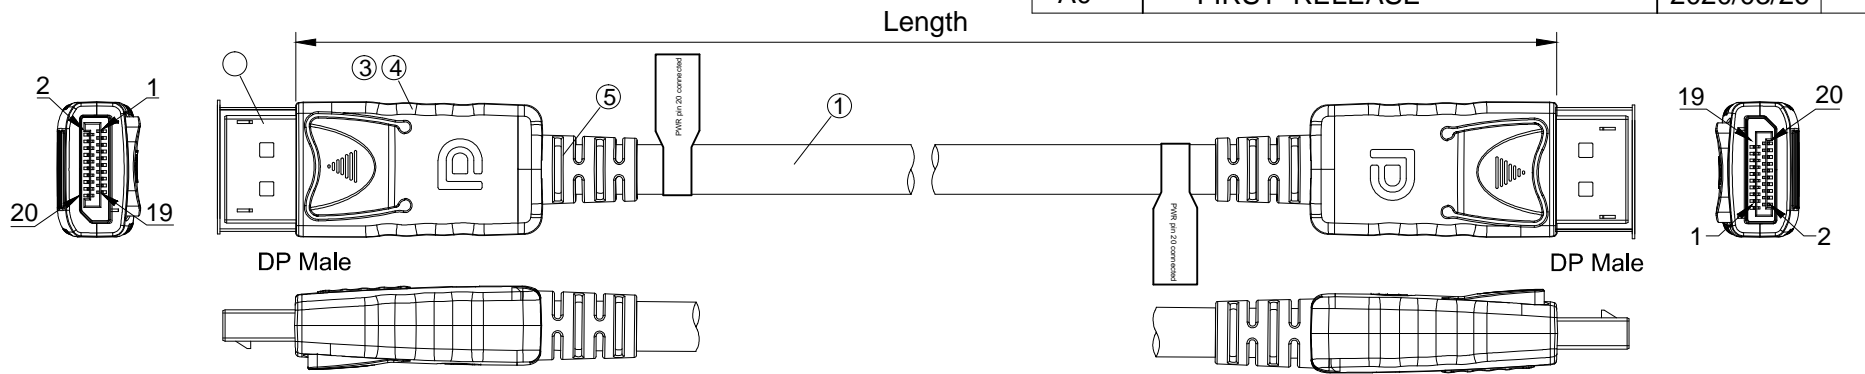


Signal Assignment

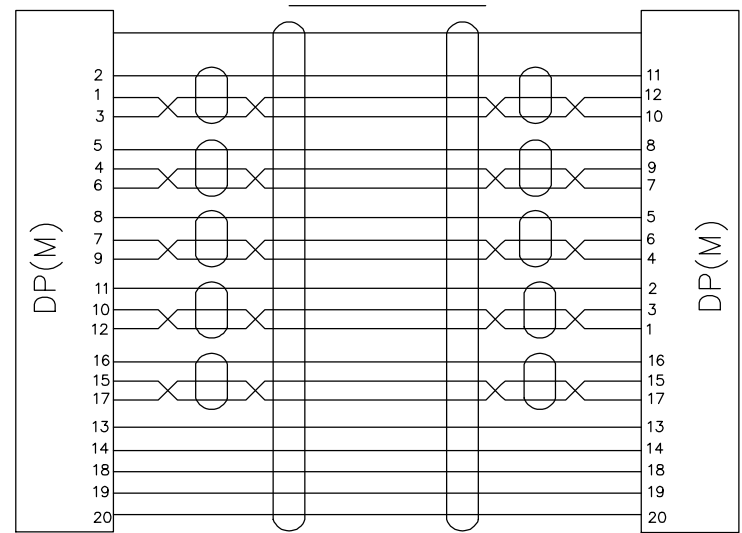


- Remark:
- 100% Open/Short Test
 - Conductive Resistance: 5ohms MAX
 - Insulation Resistance: 10M ohm MIN.
 - HI-POT: DC 300V/10MS.
 - The product is RoHS compliant.
 - Support 4K*2K@60Hz;
 - Pin 20 connected.

Item NO.	Length(m)
AK3982	5.0m

Cable Spec.

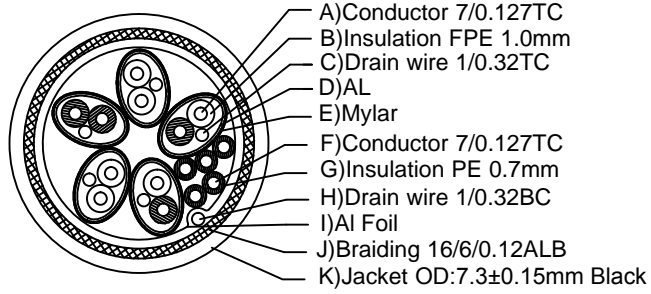

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	SR	45P PVC, Black	2PCS
④	Shell	Top and Bottom Shell, ABS with "D"Black	2SETs
③	Inernal Mold	Inner Mould PE	2PCS
②	Connector	DP male head hook, Gold-Plated	2PCS
①	Cable	(1Px28AWG +D+AL)x5p+5Cx28AWG+ML+AL+D +B; OD7.3mm PVC,Black	



ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		Dp to Dp Cable	
APPROVAL		CHECKED	DATE
		DRAWN	2020/03/26