




Visit product page

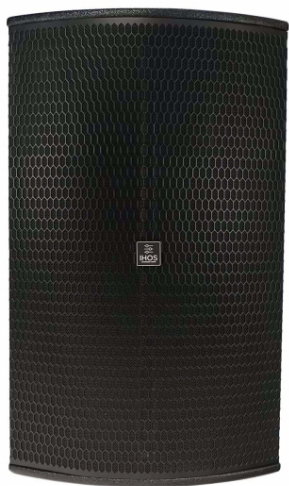

IOS 12A DSP

L005670

Professional plywood active speaker 12 inch with LCD screen and multiple DSP, German Engineering class D amplifier, 500W (LF) + 500W (HF), 1000w RMS, 1.35?? HF drive, 12`` woofer 2,5``VC, flypoints, top handle and stage monitor feature.

TECHNICAL DETAILS

Technical Specifications

2 way, bi-amp active vented design.

Power output: 1000W.

German Engineering Class D amplifier + switching power supply.

Frequency Response: 50 - 20 kHz.

Max. Output SPL: 128 dB.

Impedance: 4 Ohm.

Input SPL: -10 dBV.

Inputs: 1x XLR/1/4", 1x XLR

Outputs: 1x XLR.

Woofer 12" x1.

1,35" driver x1.

Directivity: 90° H x 60° V.

Crossover point: 1.9 kHz.

Power input: 220 / 240 Volt AC, 50 / 60 Hz.

LCD screen & multiple DSP.

15 mm PLY cabinet.

Flypoints: M10

Pole Socket: Ø35 mm.

Dimensions: 63 x 36 x 35,4 cm.

Gross Weight: 21 Kg.

Packing Details

Dimensions: 46 x 46 x 73 cm

Weight: 24 kg

PHOTOS



PRODUCT VIDEO




ACCESSORIES



iCover IOS12

Cover for IOS 12



www.fos-lighting.eu

