

MIX 7.1

B08402

DESCRIPTION

7 Channel preamp / mixer: Simple and easy to use audio mixer with up to 6 microphone or stereo line inputs !

FEATURES

- Simple and easy to use audio mixer with up to 6 microphone or stereo line inputs !
- The perfect mixer for users with little knowledge of audio equipment: pubs, soccer canteens, fitness centers, restaurants, ...
- 7 inputs in total:
 - 1x Stereo Line input (2 balanced Jacks on the rear or Stereo Mini Jack on the front panel)
 - 1x Microphone input with high & low EQ and Talkover (adjustable damping/threshold)
 - 5x Microphone / Stereo Line inputs with individual high & low EQ
- Balanced and unbalanced outputs with max. level trimmer and mono/stereo switch.
- Headphones output with volume control.
- Record output via RCA/cinch.
- Emergency message input (Euroblock connector) with automatic audio mute.
- Euroblock input: muting of the masters (closed contact = mute).






TECHNICAL SPECIFICATIONS

General : Series	No
General : Dimensions (cm)	48 x 44 x 15
General : Weight (kg)	2.3
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	20
General : Color	black
General : Display	No
General : Fixation	19" rack mountable
General : RU	1U
Audio : min. frequency (Hz)	20
Audio : max. frequency (Hz)	20000
Audio : S/N ratio (> dB)	82
Audio : max. output channels	7
Connections : input	rca, jack, IEC
Connections : output	rca, jack
Brand	JB SYSTEMS
EANCode	5420025684026



YOUR DEALER

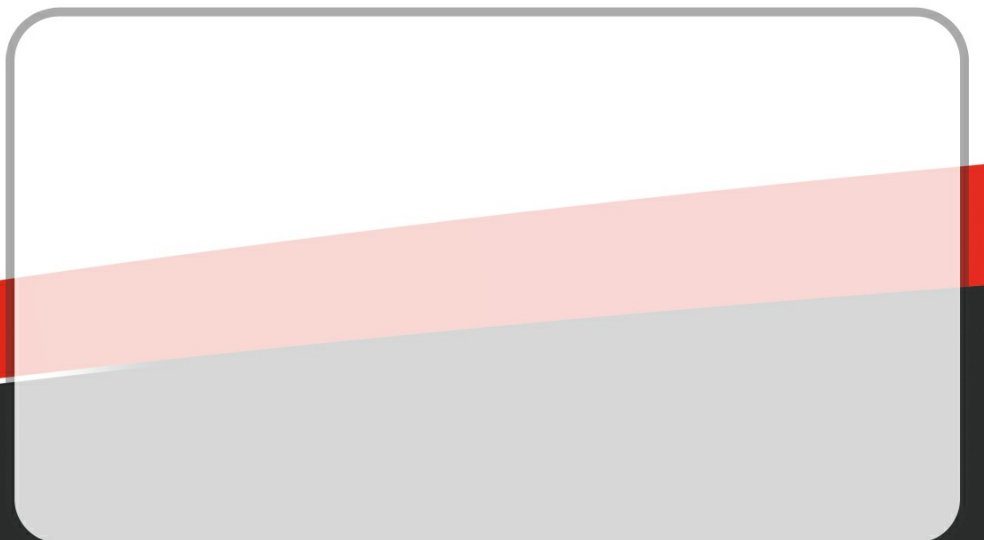

www.jb-systems.eu | <https://www.facebook.com/JBS.Belgium/>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2022 by BEGLEC NV. All rights reserved.

