

# irLED SERIES

The Contest irLED LEDs projectors series. They feature high-performance lenses perfectly adapted to any kind of installation, with an incredible light output and projection quality. They are available with a black or aluminium finishing.

## irLED64-18x12SIX

Six-colour LEDs PAR projector

**A phenomenal power and incredible colours**

- + Exclusive colour palette
- + New 12 Watts SIX LEDs
- + New self-locking mounting bracket
- + New control options

52



irLED64  
**18x12SIXss**

Finishing : Aluminium  
ref 10137



irLED64  
**18x12SIXsb**

Finishing : Satin black  
ref 10138



**REMOTE CONTROL**

The whole irLED series is supplied with remote controls. The irLED64-18x12SIX is supplied with an infrared remote control to access the colour control, built-in programs, DMX settings and a lot more.

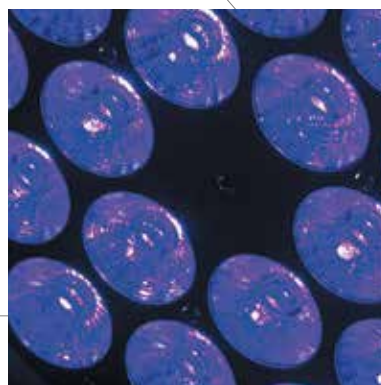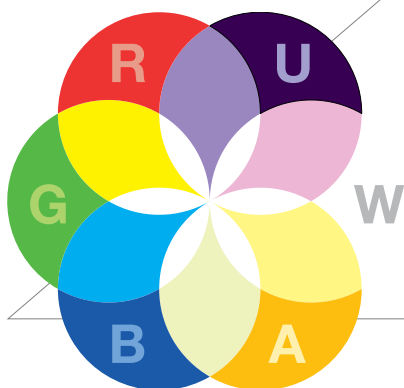

**SUBLIMATED BY UV LIGHT**

UV light is used to enhance white shades, turning them into an intense phosphorescent white.

When UV light is added to stronger colours it emphasizes their contrast, deepen their shade and you obtain a whole new palette of exclusive colours..



**NEW MOVING HEAD WITH STOP SYSTEM**

The irLED64-18x12SIX has a new double mounting bracket revolutionising ground handling. Thanks to the automatic abutment point, tightening the projector is independent from the mounting bracket blocking. You can now manipulate and adjust the projector with an optimal stability.

**TECHNICAL SPECIFICATIONS**

- 18 six-colour LEDs RGB + White + Amber + Ultraviolet
- 12W LEDs - 30 000 hours
- Beamwidth : 40°
- Light output : 5020 Lux at 2 m
- High efficiency individual lenses for a perfect light diffusion
- Access to all functions via the IR remote control
- Digital display drop-down menu to change the settings
- IEC input/output sockets
- Operating mode :
  - 2-9 DMX channels
  - Fixed colours
  - Step/Fade programs with adjustable speed

**NEW**



**FLY-irLED-64x6**

Flight case for 6 PAR64 projectors  
ref 10338

This flight case has been specifically designed to safely transport your irLED64 projectors and all their accessories.

- Automatic mode
- Sound sensitive automatic mode
- Slave mode
- Edit and play your own 20-step program
- Power consumption : 240 W
- Power supply : 100/240V - 50/60Hz, AC
- DMX input/output
- Black or silver aluminium housing
- Double holding bracket with STOP SYSTEM. Mechanical lock to prevent the bracket from fully opening once on the ground.
- Measurements : 340 x 270 x 220 mm
- Net weight : 5,4 kg